




Low Volume Internal O-Ring Installation Machine

Now there's an easier, faster way to install internal O-rings in low volume applications. O-Rings can be inserted into an internal groove or placed on a shoulder at the bottom of a bore.

- Increases production rate.
- Pneumatically actuated
- Overcomes the quality issue of damage caused by hand installation by properly seating the o-ring without rolling or twisting.
- Reduces operator fatigue.
- Strong, compact frame.
- Quick change tooling to accommodate additional O-ring sizes
- Range of O-ring sizes:
0.375 min. to 1.5 max. O.D.
- Dimensions:
10" L x 8" W x, 27" H

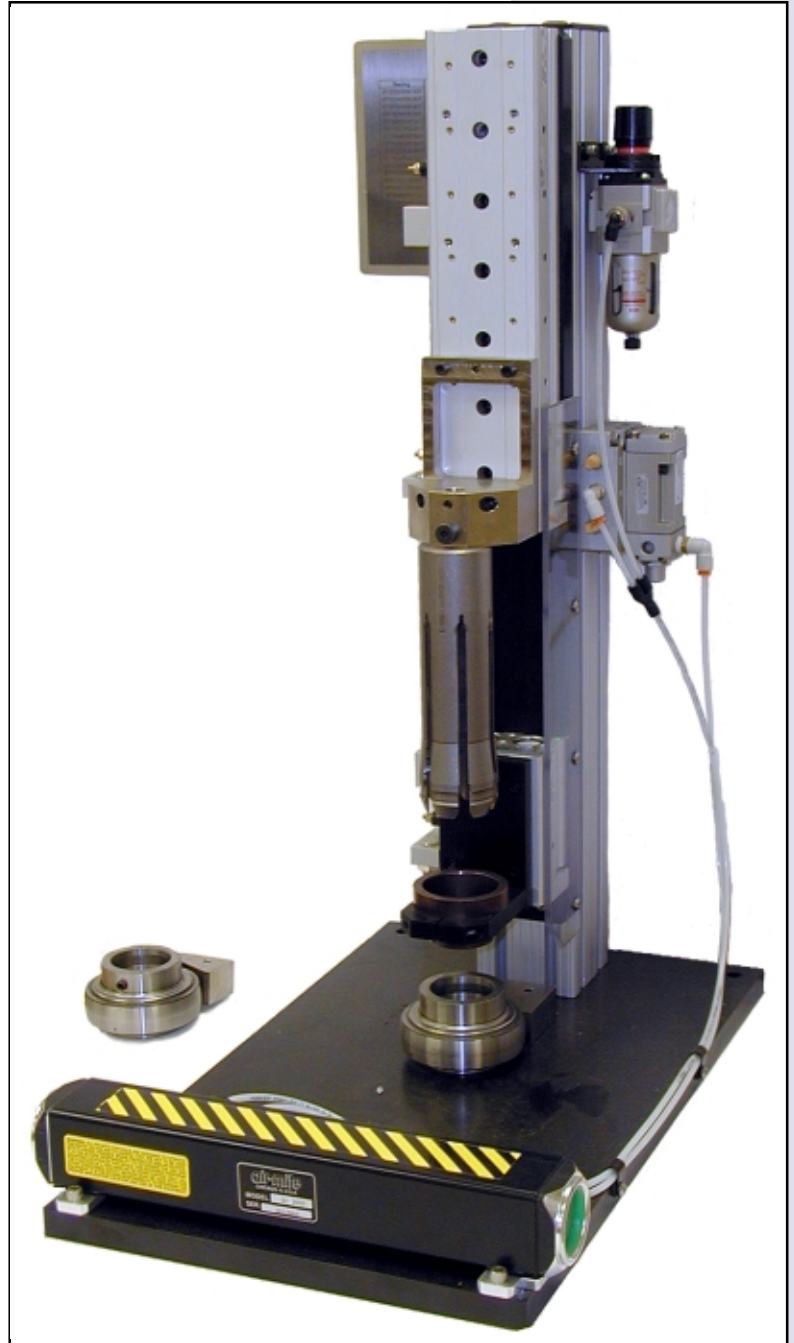

(Dimensions may vary depending upon the application.)

Automated Industrial Systems Inc.

4238 W. 12th Street • Erie, PA 16505

Phone: (814) 838-2270 • Fax: (814) 833-5661 • E-mail: info@asporing.com • <http://www.asporing.com>